



Linear-ICE Linear LED Pendant Double pendant



Linear LED translucent Pendant LINEAR-ICE-LED


Design: Pendant luminaire for direct-indirect light distribution, with luminaire head in satinised acrylic. Translucent, UV-stabilised, Cover panel transparent at the top.

Separate canopy to accommodate the electrical components.

Dali dimmable power supply remote and housed in the ceiling.

Mounting: Pendant mounting. Stepless height adjustable wire suspension for max. 5m drop height (2 toolless adjustable automatic wire clamps and 2 Y-shaped steel wires). Visible metal parts bright galvanised. Transparent connecting cables from canopy to luminaire.

Lamps	Power supply	Product code	
LED	Dali	LINEAR-ICE-DOUBLE-LED	
Luminaire Luminous Flux (Lm)	Luminaire output (W)	Luminaire efficiency (Wlm /)	Luminous colour
Cir.5560Lm	Cir.38w	-	4000K

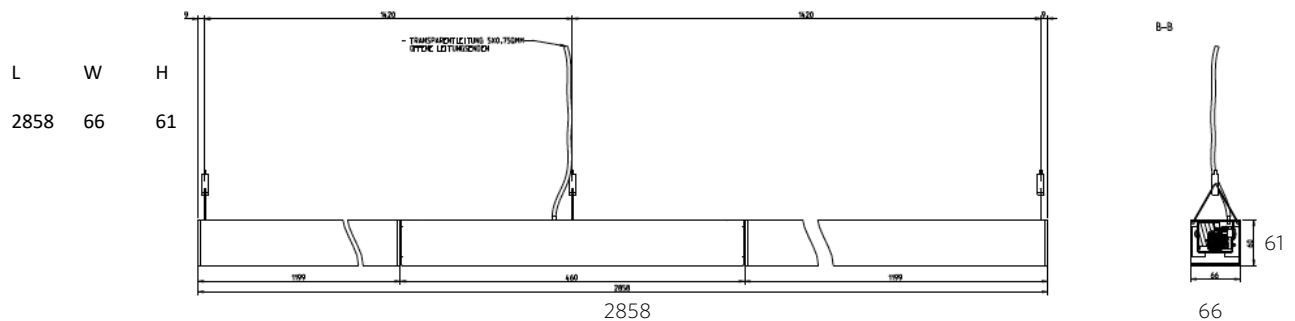

Dimensions (mm)	Weight (kg)
2858 x 66 x 61	5.5kg