



Jep LED surface-mounted ceiling luminaire



Design
M. Kocks

JEP-AQ-LED 2000-840 CH

Luminaire housing made of painted plastic integral foam with seamlessly mounted curved microprism panel in acrylic. Gear tray in powder coated steel to accommodate and cool the LED. Steel connection housing ready wired with terminals to accommodate the electronic gear. Bayonet fitting on ceiling housing for ease of luminaire mounting. Diffuse light distribution. Junction box made of powder coated galvanised steel. Surface-mounted luminaire with heat-resistant wiring. Protection rating IP20, safety class I.
Colour: Gear tray – similar to RAL 9016 white silk matt

Lamps	Ballast	Colour	Prod. code
1xLED-M 24 W	LED Driver	Specular champagne	SPJ0000003

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
1650	19	86

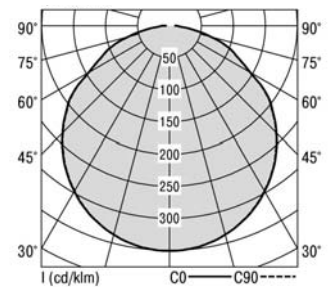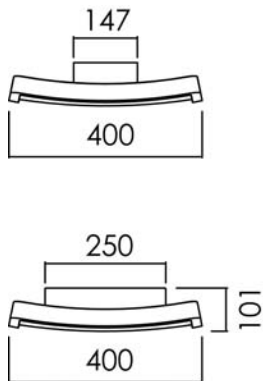

Dimens. [mm]			Weight [kg]	Photometric data		
L	B	H		Longitudinal UGR	Transverse UGR	LOR
400	400	95	3,8	21.1	20.7	100.0 %

Jep LED surface-mounted ceiling luminaire

