



## Norea Square LED surface-mounted ceiling luminaire large

Design  
P. H. Neuhorst

### NOREA-QA 625/5200/840 OS

Square luminaire element comprising an acrylic glass panel with matt surface finish on both sides. The frame is suspended at the metal body. The LED module is formed as a square LED flat board and screwed to the luminaire element. For connection of the luminaire this can be hinged down and fastened with screws at an oblong hole in the powder-coated metal body. The indirect component is ensured by recesses in the top of the metal body. The metal body accommodates the electrical components and electronic ballast. Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Suitable for ceiling or wall mounting. Also available in a dimmable version or RGBW colour change. .

Protection rating IP20, safety class I.



Colour:

Housing - similar to RAL 9016 white silk matt;

Frame - natural anodised

Lamps	Ballast	Prod. code
2xLED-M 14 W	LED Driver	SPT0000010

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
3448	32	107

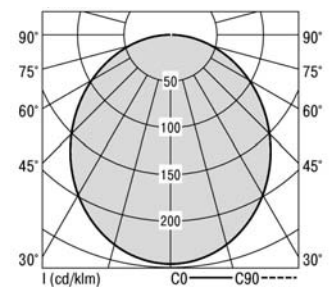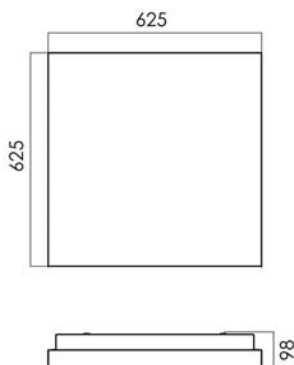

Dimens. [mm]			Weight [kg]	Photometric data		
L	B	H		Longitudinal UGR	Transverse UGR	LOR
625	625	98	11,4	20,1	19,5	66,3 %

**Norea**  
**Square LED surface-mounted ceiling**  
**luminaire large**

