



Norea Round LED surface-mounted ceiling luminaire large

Design
P. H. Neuhorst

NOREA-RA 416/4300/840 OS

Round luminaire element comprising an acrylic opal glass panel in an anodised aluminium profile frame surround. The frame is fastened to the powder coated steel body with a bayonet fixture with clip. The metal body accommodates the electrical components and electronic ballast. The LED module is formed as a round LED flat board and can be removed for installation or exchange using a key-hole screw connection. Plug-in electrical connection of the LED flat board. Luminaire with heat-resistant wiring Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Suitable for ceiling or wall mounting.

Protection rating IP20, safety class I.



Colour:

Housing - similar to RAL 9016 white silk matt;

Frame - natural anodised

Lamps	Ballast	Prod. code
1xLED-M 27 W	LED Driver	SPT0000019

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
3652	31	117

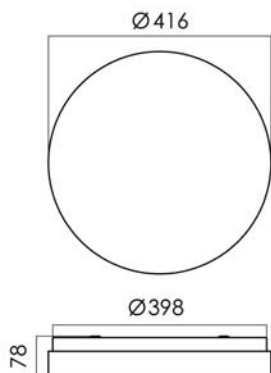

Dimens. [mm]				Weight [kg]	Photometric data		
L	B	H	D		Longitudinal UGR	Transverse UGR	LOR
416	416	78	416	4,5	26.5	25.9	71.6 %

Norea
Round LED surface-mounted ceiling
luminaire large

