



Norea Square LED surface-mounted ceiling luminaire MPS large

Design
P. H. Neuhorst

NOREA-QA 625/5200/840 MPS

Square luminaire element with a microprism panel in a natural anodised aluminium profile frame surround. The frame is suspended at the metal body. The LED module is formed as a square LED flat board and screwed to the luminaire element. For connection of the luminaire this can be hinged down and fastened with screws at an oblong hole in the powder-coated metal body. The indirect component is ensured by recesses in the top of the metal body. The metal body accommodates the electrical components and electronic ballast. Luminaire with heat-resistant wiring. Variant suitable for office use with a microprism panel MPS. The LED points are visible as circles on the microprism panel. Suitable for ceiling or wall mounting. Also in a dimmable version. Light colours 830 und 840.

Protection rating IP20, safety class I.



Colour:

Housing – similar to RAL 9016 White silk matt;

Frame – natural anodised

Lamps	Ballast	Prod. code
2xLED-M 14 W	LED Driver	SPT0000105

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
3583	32	111

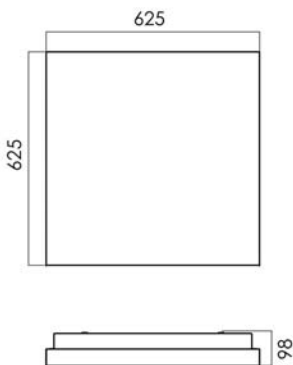

Dimens. [mm]			Weight [kg]	Photometric data		
L	B	H		Longitudinal UGR	Transverse UGR	LOR
625	625	98	11,4	16,3	15,6	68,9 %

Norea
Square LED surface-mounted ceiling
luminaire MPS large

