

Stora LK


Timeless pendant rings beautifully built in Germany.

LED

Using an innovative, profiled aluminium extrusion, the Stora LK pendant features continuous direct lighting. The polar white diffuser creates homogenous light for a classic and timeless aesthetic. Multiple permutations and custom finishes are available upon request.





Using LED's mounted to individual heat sinks keeps the temperature constant and the output to an optimum. It also uniquely allows components to be accessed without demounting the fitting.

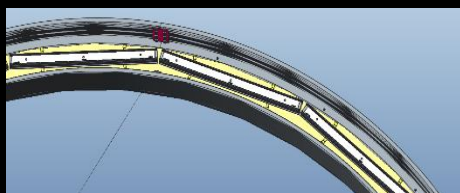

Spectral Pendant systems

Diameter Options:


Standard sizes 1500mm / 1900mm

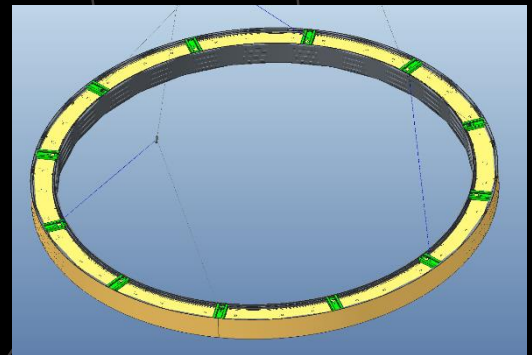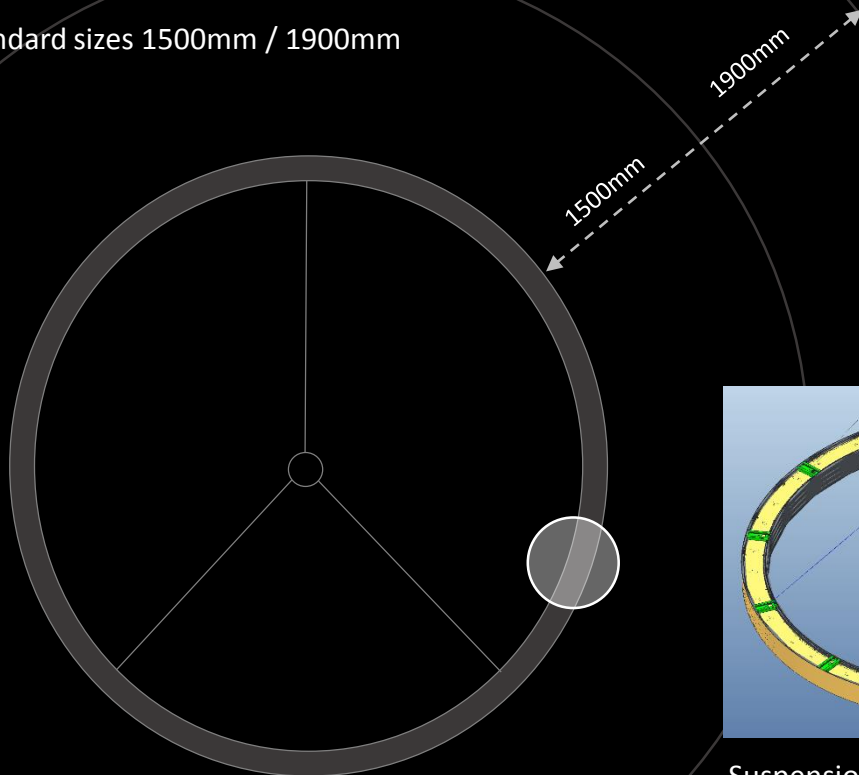

Suspension features stabilising system.

STORA LK Product Specification data: 1900mm



Power:	108 watts
Cri:	85+
Led:	18no. Standard 6w 300mm PCB's with integral heat sinks
Lumens:	direct 9500 luminaire Lumens (initial cir. 14200 Lm)
IP rating:	IP20
Diffuser :	Opal PMMA, MPS on request
Body :	Aluminium extrusion
Finish :	Any RAL
Control :	Dali Dimmable version available
Power supply :	220-240v 50-60 Hz mounted in rose
Weight :	28,128 kg

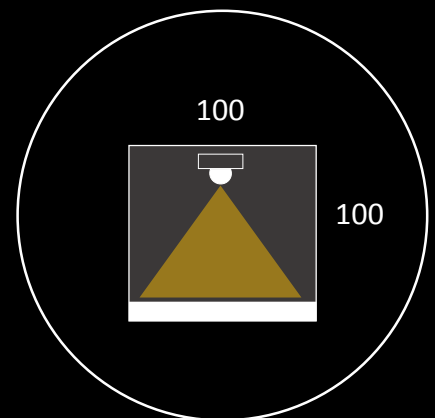

Spectral Pendant systems

Diameter Options:


Standard sizes 1500mm / 1900mm

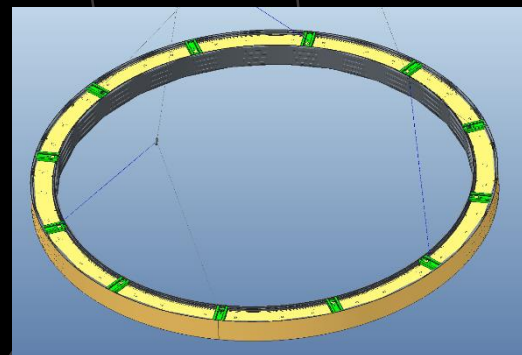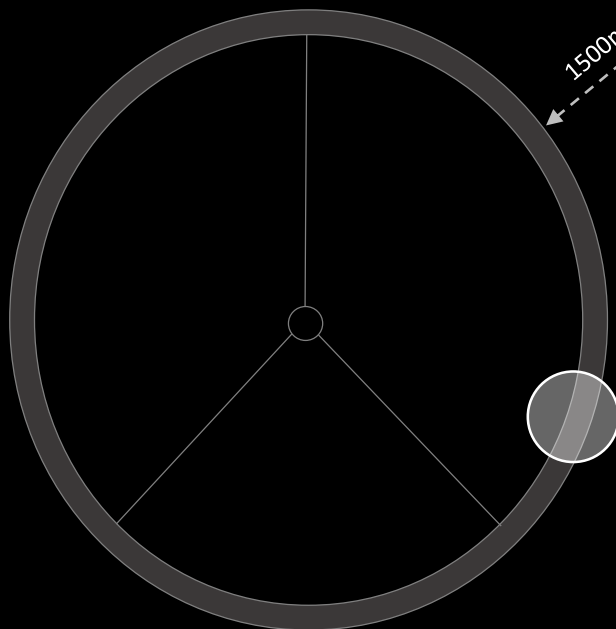

Suspension features stabilising system.

STORA LK Product Specification data: 1500mm



Power:	90 watts
Cri:	85+
Led:	21no. 6w Standard 200mm PCB's with integral heat sinks
Lumens:	cir. 11250 Lm direct
IP rating:	IP20
Diffuser :	Opal PMMA, MPS on request
Body :	Aluminium extrusion
Finish :	Any RAL
Control :	Dali Dimmable version available
Power supply :	220-240v 50-60 Hz mounted in rose
Weight :	cir. 26 kg

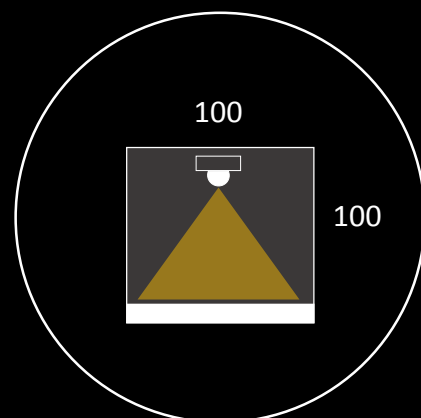

Spectral Pendant systems

Diameter Options:

Standard sizes 1200 / 1500mm / 1900mm

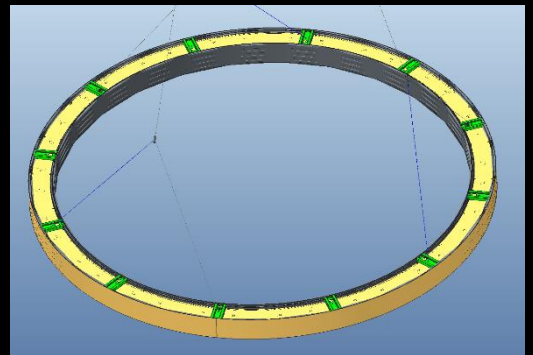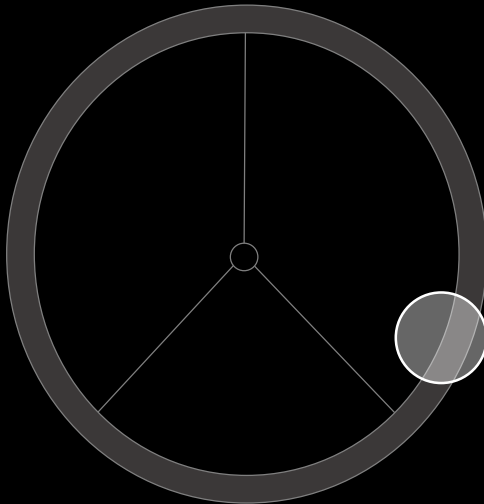

Suspension features stabilising system.

STORA LK Product Specification data: 1200mm special order

Power:	66 watts
Cri:	85+
Led:	11no. 6w Standard 200mm PCB's with integral heat sinks
Lumens:	cir. 8250 Lm direct
IP rating:	IP20
Diffuser :	Opal PMMA, MPS on request
Body :	Aluminium extrusion
Finish :	Any RAL
Control :	Dali Dimmable version available
Power supply :	220-240v 50-60 Hz mounted in rose
Weight :	cir.20 kg

