


## Stora Square LED surface-mounted luminaire

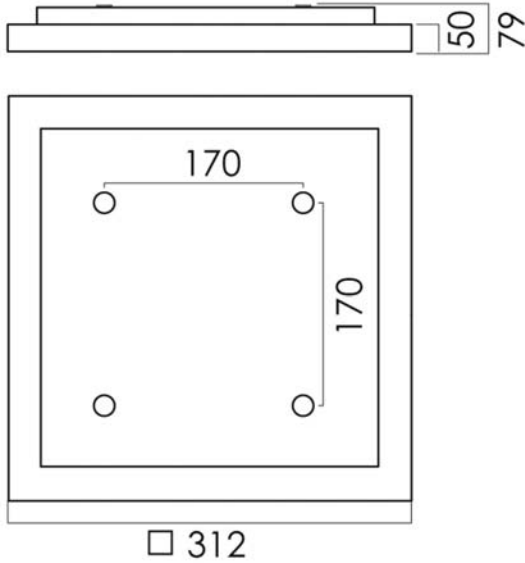

### STORA-QA-LED 2600/840 OS-DA

Square luminaire element with an opal acrylic panel mounted in a profile frame made of power-coated aluminium. The frame is screwed to the powder-coated metal gear tray body. The underneath of the metal body accommodates the lamp formed as a square LED flat board, the top houses the electrical components. The indirect lighting component is provided by recesses in the top of the metal body. Mechanical ceiling fixture to a white power-coated mounting box takes place using a connecting spring, electrical connection by means of a plug and socket system. The luminaire is configured with heat-resistant wiring. Homogeneous illumination of the light surface. Suitable for ceiling or wall mounting. Light colour 4000 K (840), dimmable.


Protection rating IP20, safety class I.

Colour:

Frame - similar to RAL 9016 white silk matt

Light colour 4000 K (840). Also in a dimmable version.

Lamps	Ballast	Prod. code
1xLED-M 14 W	LED Driver DALI	SPC0630017



Dimens. [mm]			Weight [kg]			
L	B	H				
312	312	80	4,4			

### EEC A++ - A

Energy efficiency class scale A++ - E

## Stora Square LED surface-mounted luminaire

